

Features :

With low leakage inductance

With high efficiency

With high frequency

High magnetic flux

Strong anti-interference

Low loss magnetic materials

Low profile and nice exterior

Distributed capacitance .

Application:


1. monitor, scanner ,duplicator

2. mobile adapter , printer 3. game machine

4. charger, alarm system

5.communication control equipment, switching power supply ,inverter

6.UPS power supply, visual equipment etc.

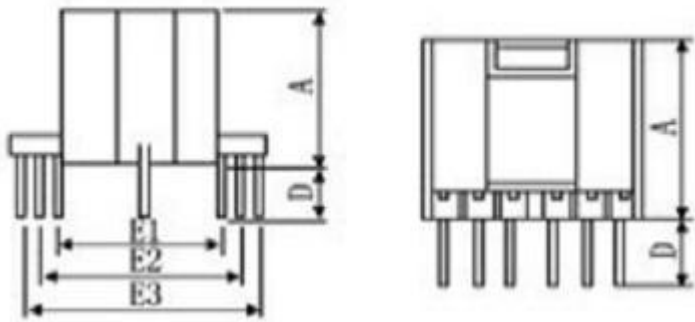

Model	Pin	Dimension (mm)				
		A	B	C	D	E
EPC-13	4+4	6	17	20	3.0	13.5
EPC-15	5+5	7.3	18.2	21.35	2.5	15
EPC-19	5+5	7.5	19.3	22.6	3.0	16.7
EPC-19	5+6	9.4	25.3	27.7	3.75	21.7
EPC-20	6+6	9.7	24	26.8	3	20
EPC-25	5+5	13.4	29.7	35.4	5	25
EPC-30	5+5	12.6	29.7	31.5	5	25

EPC-35		6+6	12.6	31.6	35.3	5	30
Item	Model	Dimension (mm)			VA		Weight
		A	B	C	f=50KHz	f=100KHz	g
6	EPC-9.5	10	5.5	10	1.1	2.5	9
7	EPC-13	14	9	14	5	8	11
8	EPC-17	19	11	18	14	20	18
9	EPC-19	20	13	21	18	27	21
10	EPC-25	27	17	26	36	59	29
11	EPC-27	29	17	36	52	75	35